


Environmental Product Declaration

In accordance with 14025 and EN15804 +A2

Simotec pipe shoes

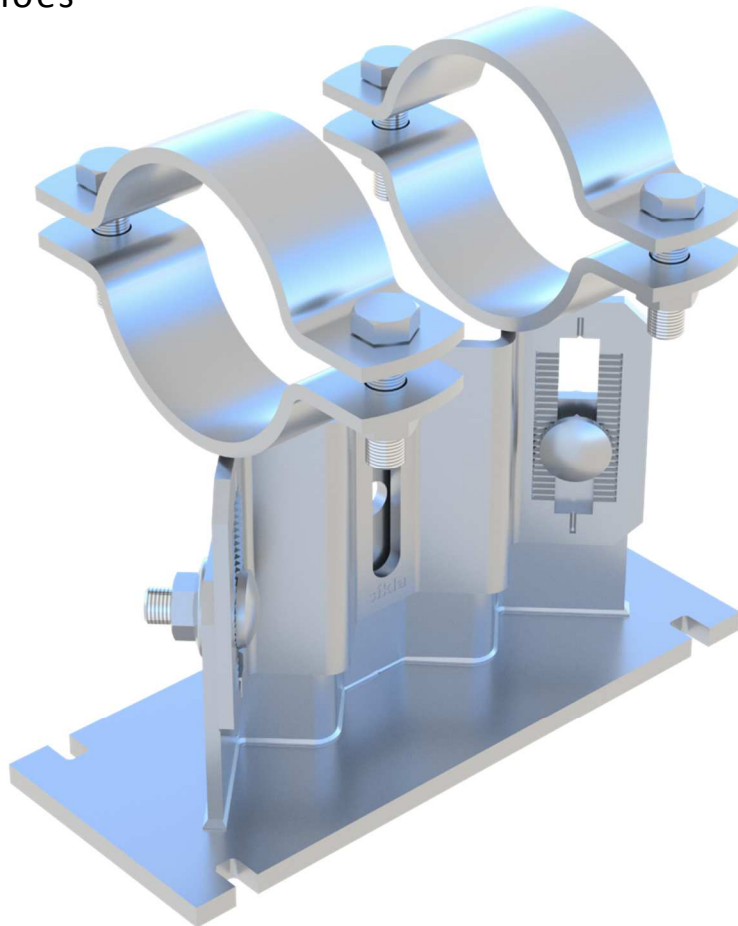

sikla

Owner of the declaration:
Sikla GmbH

Product name:
Simotec pipe shoes
LA HV HCP; LC HV HCP; LD HV HCP

Declared unit:
1 kg average of Simotec pipe shoes

Product category /PCR:
NPCR Part B for Steel and Aluminum Construction
Products (references to EN15804+A2)

Program holder and publisher:
The Norwegian EPD foundation

Declaration number:
NEPD-4539-3796-EN

Registration number:
NEPD-4539-3796-EN

Issue date: 07.06.2023

Valid to: 07.06.2028

General information

Product:

Simotec pipe shoes

Program Operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Tel.: +47 23 08 80 00
E-mail: post@epd-norge.no

Declaration number:

NEPD-4539-3796-EN

This declaration is based on Product

Category Rules:

NPCR Part B for Steel and Aluminum Construction Products (references to EN15804+A2)

Statements:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidence.

Declared unit:

1 average kg of Simotec pipe shoes

Declared unit with option:

1 average kg of Simotec pipe shoes
Modules A1-A3, A4, C1-C4 and D

Functional unit:

NA

Verification:

Independent verification of the declaration and data, according to ISO14025:2010

internal

external



Silvia Vilčeková

Independent verifier approved by EPD Norway

Owner of the declaration:

Sikla
Contact person: Doreen Volz
Tel.: +49 7720 948 437
E-mail: doreen.volz@sikla.com

Manufacturer:

Sikla GmbH
In der Lache 17
78056 Villingen-Schwenningen
Tel.: +49 7720 948 0
E-Mail: info@sikla.de

Place of production:

Sikla production facilities in Europe

Management system:

ISO 9001:2015

Organization no:

HRB 70289

Issue date:

07.06.2023

Valid to:

07.06.2028

Year of study:

2021

Comparability:

EPDs from other programs than [Name of Program operator] may not be comparable.

The EPD has been worked out by:

Trebostad, M., Johansen, B.H., Energiråd AS

Approved



Manager of EPD Norway

Product

Product description:

Pipe shoes are specific products which support pipes from a variety of surfaces. Sikla's Simotec pipe shoes have two separate parts which are bolted together. The top part contains pipe clamps in two different versions single clamp or double clamp. The bottom part consists of a single base plate or a dual base plate. Due to the version and pipe size, a pipe shoe can have maximum of two pipe clamps with two base plates. The pipe shoes allow adjustments in elevation in steps of 2.5mm. The pre-mounted slide plate on the base plate helps the slide of the product. The pipe shoe can be used as a skid, a guide support or as a fixed point. The product is tested by the independent and accredited laboratory TÜV which complies all relevant regulations regarding to industrial pipe work installation. It benefits from a reassuring level of safety guaranteed by tested corrosion resistance to Corrosivity Category C4-high according to EN ISO 12944-2.

Materials	KG	%
Steel, unalloyed	0,62	62%
Steel, low-alloyed	0,35	35%
Polyamide 6, glass-filled	0,02	2%
Steel, stainless	0,01	1%

Market:

Global

Reference service life, product:

This EPD does not declare the construction process (A5) and use stages (B1-B7). The lifetime of zinc coated steel will depend on specific application and environmental conditions. Hence, a reference service life is not declared for the product.

Reference service life, building:

N/A

LCA: Calculation rules

Declared unit:

1 average kg of Simotec pipe shoes

Data quality:

Upstream:

Specific data was acquired by using measurable consumption and emission data from Sikla its suppliers for 2021.

Downstream:

Scenarios were developed based on PCR and sales statistics. PCR defaults and database data were used.

Conversion to process flows and LCI:

Conversion to primary flows and environmental impacts was done using OpenLCA (version 1.11.0). Datasets from the ecoinvent v3.8 cutoff database with the EN15804 add-on developed by GreenDelta were selected according to their technological, geographical and temporal representativeness for the assessed process.

Impact assessment:

Open LCA software (version 1.11.0) was used to perform the impact assessment of this LCA. The latter refers to the LCIA characterization models, factors and methods as given in EN15804:2012+A2:2019, labelled 'EN15804_A1_2020_3' and 'EN15804_A2_additional_2020' in Open LCA.

Allocation:

The allocation is made according to the requirements of EN 15804. The energy, water and waste consumption of the company's own production is equally allocated to all products by mass allocation. Effects of primary production of recycled materials are allocated to the main product in which the material is used. The recycling process and transport of the material are allocated to this analysis.

System boundary:

The scope of the study is cradle to gate with options, described as A1-A3, A4, C1-C4 and D modules. A4 scenario is calculated for average transport in Europe. In addition, impact data per 1000 km of global shipment is supplied. Two end-of-life scenarios (C2-C4 + D) are considered, one for recycling (scenario A), and one for 100% reuse (scenario B).

Modules A1-A3 considers the life cycle stages from the extraction of raw materials to the arrival of the product at the assembly site, including all transport stages. Steel scrap from the production processes is treated in a closed loop, so that it is returned to production as an input.

Module A4 considers transport from Sikla's facilities to the end user. Average impacts from transport to customers are calculated for the European Economic Area (A4EUR). In addition, standard impacts for transport to/from ports (A4PORT) and impacts per km of sea transport (A4SEA) are given for the global market, so that the impact of transport to non-EUR customers can be estimated using the sea distance from Hamburg to the local port.

End-of-Life: Two scenarios are considered for the end-of-life phases (C1-C4 and D), one for a recycling route (scenario A) and one for a product reuse route (scenario B)

Module C1_A and C1_B accounts for the disassembly of pipe shoes, by operation of electric screwdriver.

Modules C2_A-C4_A includes the transport to scrap handling facility, waste handling, scrap sorting and preparation for remelting, as well as the landfilling of a small fraction of the steel (2%) due to losses/inefficiencies in the handling process.

Module D_A includes the impacts of melting and casting of recovered steel scrap, and the potential benefits of avoiding the use of virgin metals for the next product life cycle.

Modules C2_B-C4_B accounts for the transport and waste handling of plastic components.

Module D_B includes the loads of transport and replacement of the plastic components, and the potential benefits from the avoided production of new product for the next product life cycle. Potential maintenance of the reused product is not included.

Cut-off criteria:

All major raw materials and all the essential energy are included. The production process for raw materials and energy flows that represent very small amounts (<1%) are not included.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to assembly/user (A4)

Type	Capacity utilization (incl. return) %	Type of vehicle	Distance KM	Fuel/Energy consumption	value (l/t)
Truck_EUR	53 %	lorry >32 metric ton, EURO6	623	0,0228l/t*km Diesel	14,24
Truck_GLO	53 %	lorry >32 metric ton, EURO6	815	0,0228 l/t.km Diesel	18,63
Boat_GLO	70 %	container ship	X	0,0003 l/t.km HFO	N/A

The transport scenario considered for the European market is based on the distribution of sales in Europe in 2021 and corresponding transport data. Data sets from the EcoInvent database were used.

The transport distance for Europe can be considered as an average for the whole European market. For deliveries to the global market, the transport distance by truck is based on the transport distance from Sikla's plants to Hamburg and a standard transport distance of 300 km from the port of destination to the end user. Sea transport to global customers can be estimated by determining the sea distance from Hamburg to the local port.

Project specific transport data is available from Sikla on request.

Scenario A (recycling)

The following information describe the End-of-life modules in the recycling scenario.

End of Life (C1_A, C3_A, C4_A)

	Unit	Value
Hazardous waste disposed	Kg	-
Collected as mixed construction waste	Kg	-
Reuse	Kg	-
Recycling	Kg	0,96
Energy recovery	Kg	0,02
To landfill	Kg	0,02

All Simotec pipe shoes are disassembled and transported to waste handling of plastics, and sorting and preparation for steel recycling/remelting. Waste plastics are incinerated for energy. 2% of the steel scrap is not recovered and therefore landfilled.

Transport to waste processing (C2_A)

Type	Capacity utilization (incl. return) %	Type of vehicle	Distance KM	Fuel/Energy consumption	value (l/t)
Truck	37 %	lorry 16-32 metric ton, EURO6	30,0	0,0436 l/t.km Diesel	1,309

Benefits and loads beyond the system boundaries (D_A)

	Unit	Value
Remelted steel scrap	kg	0,96
Substituted new unalloyed steel	kg	0,54
Substituted new low-alloyed steel	kg	0,31
Substituted new stainless steel	kg	0,01

The recovered steel from the pipe shoes is assumed to be used as scrap input in the production of secondary steel. Due to losses in the remelting process, this steel substitutes a smaller amount of new steel. Primary steel will have a varying degree of recycled content. For this study, the low- and unalloyed secondary steel is assumed to replace average European steel produced by blast oxygen furnaces.

Scenario B (80% reuse)

The following information describe the End-of-life modules in the reuse scenario.

End of Life (C1_B, C3_B, C4_B)

	Unit	Value
Hazardous waste disposed	Kg	-
Collected as mixed construction waste	Kg	-
Reuse	Kg	0,981
Recycling	Kg	-
Energy recovery	Kg	0,019
To landfill	Kg	-

After disassembly the plastic components, the pipe shoes are sent to waste treatment, while all steel components are transported to the new assembly site. Waste plastics are incinerated for energy.

Transport to waste processing (C2_B)

Type	Capacity utilization (incl. return) %	Type of vehicle	Distance KM	Fuel/Energy consumption	value (l/t)
Truck	37 %	lorry 16-32 metric ton, EURO6	30,0	0,0436 l/t.km Diesel	1,309

The module only considers the transport of waste plastics to waste treatment and the handling of reusable products are considered in the D_B module.

Benefits and loads beyond the system boundaries (D_B)

	Unit	Value
Need for replacement plastic sliders	kg	0,02
Transport to new assembly location	kg*km	20
Substituted new pipe shoes in reuse application	kg	1

The Simotec pipe shoes are adjustable and reusable without material losses or structural degradation, except for the plastic sliders. All the steel components are therefore considered for a transport to a new assembly site (assumed avg. 20 km) and reassembled.

Reused pipe shoes are considered to replace the production in the new assembly and transport of new pipe shoes (modules A1-A4).

LCA: Results

System boundaries (X=included, MND= module not declared, MNR=module not relevant)

Product stage			Assembly stage		Use stage								End of life stage				Benefits & loads beyond system boundary
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	

Results for Scenario A

The following chapter presents the results for the recycle scenario. The A1-A4 modules are identical for the two scenarios but are presented for both scenarios for ease of navigation.

Core environmental impact indicators

Indicator	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _A	C2 _A	C3 _A	C4 _A	D _A
GWP-total	kg CO2 eq.	2,77E+00	5,43E-02	7,61E-02	1,01E-05	5,70E-04	4,89E-03	4,69E-02	1,00E-04	-1,18E+00
GWP-fossil	kg CO2 eq.	2,75E+00	5,42E-02	7,59E-02	1,01E-05	5,50E-04	4,88E-03	4,81E-02	1,00E-04	-1,18E+00
GWP-biogenic	kg CO2 eq.	1,84E-02	8,65E-05	1,20E-04	2,40E-10	2,01E-05	8,69E-06	-1,23E-03	2,96E-07	4,35E-03
GWP-LULUC	kg CO2 eq.	1,85E-03	2,05E-05	2,87E-05	7,27E-09	1,29E-06	1,96E-06	2,86E-05	9,54E-08	-7,07E-05
ODP	kg CFC11 eq.	1,46E-07	1,35E-08	1,89E-08	2,00E-12	2,75E-11	1,13E-09	2,77E-09	4,18E-11	-4,54E-08
AP	mol H ⁺ eq.	1,14E-02	1,70E-04	2,40E-04	3,28E-07	3,11E-06	1,39E-05	2,80E-04	9,71E-07	-4,31E-03
EP-freshwater	kg P eq.	1,44E-03	3,55E-06	4,97E-06	3,33E-10	5,51E-07	3,22E-07	1,53E-05	9,54E-09	-5,10E-04
EP-marine	kg N eq.	2,59E-03	3,87E-05	5,43E-05	8,07E-08	5,20E-07	2,82E-06	8,14E-05	3,38E-07	-1,02E-03
EP-terrestrial	mol N eq.	2,69E-02	4,20E-04	5,90E-04	8,96E-07	4,57E-06	3,07E-05	7,10E-04	3,70E-06	-1,11E-02
POCP	kg NMVOC eq.	1,04E-02	1,60E-04	2,30E-04	2,31E-07	1,24E-06	1,15E-05	1,90E-04	1,05E-06	-5,28E-03
ADP-M&M	kg Sb eq.	5,17E-05	1,25E-07	1,75E-07	1,30E-11	4,90E-09	1,66E-08	2,75E-06	2,22E-10	-9,63E-06
ADP-fossil	MJ	2,70E+01	6,67E-02	9,35E-02	7,05E-06	5,53E-03	5,65E-03	1,07E-01	2,20E-04	-1,50E+01
WDP	m ³	1,22E+00	4,50E-03	6,31E-03	3,22E-07	4,30E-04	3,60E-04	9,09E-03	1,30E-04	-6,80E-02

GWP-total: Global Warming Potential; **GWP-fossil:** Global Warming Potential fossil fuels; **GWP-biogenic:** Global Warming Potential biogenic; **GWP-LULUC:** Global Warming Potential land use and land use change; **ODP:** Depletion potential of the stratospheric ozone layer; **AP:** Acidification potential, Accumulated Exceedance; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; See "additional Norwegian requirements" for indicator given as PO4 eq. **EP-marine:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-terrestrial:** Eutrophication potential, Accumulated Exceedance; **POCP:** Formation potential of tropospheric ozone; **ADP-M&M:** Abiotic depletion potential for non-fossil resources (minerals and metals); **ADP-fossil:** Abiotic depletion potential for fossil resources; **WDP:** Water deprivation potential, deprivation weighted water consumption

Additional environmental impact indicators

Indicator	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _A	C2 _A	C3 _A	C4 _A	D _A
PM	Disease incidence	1,68E-07	4,74E-09	6,64E-09	3,04E-13	9,15E-12	3,09E-10	4,08E-09	1,90E-11	-6,86E-08
IRP	kBq U235 eq.	1,94E-01	4,46E-03	6,25E-03	5,82E-07	3,20E-04	3,80E-04	3,28E-03	1,28E-05	6,02E-02
ETP-fw	CTUe	6,51E-01	3,73E-02	5,22E-02	1,39E-06	7,81E-05	2,48E-03	2,97E-02	1,99E-05	3,25E-02
HTP-c	CTUh	1,41E-08	1,60E-11	2,25E-11	5,46E-15	2,24E-13	1,58E-12	4,53E-11	3,95E-14	3,19E-09
HTP-nc	CTUh	1,77E-07	1,02E-09	1,42E-09	6,32E-14	3,61E-11	9,19E-11	6,01E-09	1,41E-12	-4,65E-09
SQP	Pt	6,55E+00	1,33E+00	1,86E+00	3,56E-06	4,60E-04	6,28E-02	7,72E-02	4,91E-03	-2,24E+00

PM: Particulate matter emissions; **IRP:** Ionizing radiation, human health; **ETP-fw:** Ecotoxicity (freshwater); **ETP-c:** Human toxicity, cancer effects; **HTP-nc:** Human toxicity, non-cancer effects; **SQP:** Land use related impacts / soil quality

Resource use

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _A	C2 _A	C3 _A	C4 _A	D _A
RPEE	MJ	1,99E+00	8,71E-03	1,22E-02	5,90E-07	2,09E-03	8,00E-04	2,20E-02	1,67E-05	-1,24E-01
RPEM	MJ	5,67E-01	2,49E-03	3,49E-03	2,77E-07	3,10E-04	2,60E-04	2,99E-02	7,89E-06	-1,14E-01
TPE	MJ	2,56E+00	1,12E-02	1,57E-02	8,67E-07	2,40E-03	1,06E-03	5,19E-02	2,46E-05	-2,38E-01
NRPE	MJ	3,02E+01	8,32E-02	1,17E-01	7,82E-06	1,10E-02	7,21E-03	1,52E-01	2,50E-04	-1,39E+01
NRPM	MJ	1,10E+01	8,04E-01	1,13E+00	1,20E-04	2,81E-03	6,73E-02	1,88E-01	2,66E-03	-1,28E+00
TRPE	MJ	4,12E+01	8,87E-01	1,24E+00	1,30E-04	1,39E-02	7,45E-02	3,40E-01	2,90E-03	-1,51E+01
SM	kg	4,66E-01	7,80E-04	1,09E-03	8,88E-08	1,50E-04	7,59E-05	9,85E-01	1,56E-06	7,74E-01
RSF	MJ	9,66E-02	2,20E-04	3,10E-04	7,92E-09	8,37E-05	2,26E-05	6,70E-04	2,74E-07	1,92E-02
NRSF	MJ	1,25E-01	6,60E-04	9,30E-04	1,49E-08	5,61E-05	9,18E-05	5,10E-04	3,95E-07	5,58E-03
W	m ³	2,88E-02	1,10E-04	1,50E-04	7,81E-09	1,01E-05	8,57E-06	2,10E-04	3,11E-06	-1,80E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Nonrenewable primary energy resources used as energy carrier; NRPM Nonrenewable primary energy resources used as materials; TRPE Total use of nonrenewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of nonrenewable secondary fuels; W Use of net fresh water

End of life - Waste

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _A	C2 _A	C3 _A	C4 _A	D _A
HW	KG	7,04E+00	1,79E-02	2,50E-02	1,72E-06	2,73E-03	1,66E-03	1,04E-01	4,76E-05	-2,15E+00
NHW	KG	3,47E-01	8,21E-02	1,15E-01	2,24E-07	3,45E-05	3,84E-03	2,51E-02	1,96E-02	3,21E-02
RW	KG	1,91E-03	1,65E-05	2,31E-05	1,45E-09	3,43E-06	1,49E-06	2,93E-05	3,65E-08	7,20E-04

HW Hazardous waste disposed; NHW Nonhazardous waste disposed; RW Radioactive waste disposed

End of life – output flow

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _A	C2 _A	C3 _A	C4 _A	D _A
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	4,68E-01	6,10E-04	8,50E-04	7,96E-08	1,40E-04	6,30E-05	9,63E-01	9,91E-07	-2,08E-01
MER	kg	3,69E-03	1,90E-04	2,70E-04	5,17E-08	7,78E-07	1,74E-05	2,30E-04	5,49E-07	-1,17E-03
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ETE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

Results for Scenario B

The following chapter presents the results for the re-use scenario. The A1-A4 modules are identical for the two scenarios but are presented for both scenarios for ease of navigation.

Core environmental impact indicators

Indicator	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _B	C2 _B	C3 _B	C4 _B	D _B
GWP-total	kg CO2 eq.	2,77E+00	5,43E-02	7,61E-02	1,01E-05	5,70E-04	3,33E-05	2,67E-02	0,00E+00	-2,68E+00
GWP-fossil	kg CO2 eq.	2,75E+00	5,42E-02	7,59E-02	1,01E-05	5,50E-04	3,32E-05	2,67E-02	0,00E+00	-2,66E+00
GWP-biogenic	kg CO2 eq.	1,84E-02	8,65E-05	1,20E-04	2,40E-10	2,01E-05	5,30E-08	3,49E-06	0,00E+00	-1,81E-02
GWP-LULUC	kg CO2 eq.	1,85E-03	2,05E-05	2,87E-05	7,27E-09	1,29E-06	1,26E-08	3,52E-07	0,00E+00	-1,87E-03
ODP	kg CFC11 eq.	1,46E-07	1,35E-08	1,89E-08	2,00E-12	2,75E-11	8,29E-12	1,16E-10	0,00E+00	-1,59E-07
AP	mol H ⁺ eq.	1,14E-02	1,70E-04	2,40E-04	3,28E-07	3,11E-06	1,06E-07	9,25E-06	0,00E+00	-1,09E-02
EP-freshwater	kg P eq.	1,44E-03	3,55E-06	4,97E-06	3,33E-10	5,51E-07	2,17E-09	9,53E-08	0,00E+00	-1,44E-03
EP-marine	kg N eq.	2,59E-03	3,87E-05	5,43E-05	8,07E-08	5,20E-07	2,37E-08	2,23E-05	0,00E+00	-2,46E-03
EP-terrestrial	mol N eq.	2,69E-02	4,20E-04	5,90E-04	8,96E-07	4,57E-06	2,59E-07	4,35E-05	0,00E+00	-2,60E-02
POCP	kg NMVOC eq.	1,04E-02	1,60E-04	2,30E-04	2,31E-07	1,24E-06	9,97E-08	1,15E-05	0,00E+00	-1,02E-02
ADP-M&M	kg Sb eq.	5,17E-05	1,25E-07	1,75E-07	1,30E-11	4,90E-09	7,66E-11	2,90E-09	0,00E+00	-5,12E-05
ADP-fossil	MJ	2,70E+01	6,67E-02	9,35E-02	7,05E-06	5,53E-03	4,09E-05	1,79E-03	0,00E+00	-2,67E+01
WDP	m ³	1,22E+00	4,50E-03	6,31E-03	3,22E-07	4,30E-04	2,76E-06	1,63E-03	0,00E+00	-1,13E+00

GWP-total: Global Warming Potential; **GWP-fossil:** Global Warming Potential fossil fuels; **GWP-biogenic:** Global Warming Potential biogenic; **GWP-LULUC:** Global Warming Potential land use and land use change; **ODP:** Depletion potential of the stratospheric ozone layer; **AP:** Acidification potential, Accumulated Exceedance; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; See “additional Norwegian requirements” for indicator given as PO4 eq. **EP-marine:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-terrestrial:** Eutrophication potential, Accumulated Exceedance; **POCP:** Formation potential of tropospheric ozone; **ADP-M&M:** Abiotic depletion potential for non-fossil resources (minerals and metals); **ADP-fossil:** Abiotic depletion potential for fossil resources; **WDP:** Water deprivation potential, deprivation weighted water consumption

Additional environmental impact indicators

Indicator	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _B	C2 _B	C3 _B	C4 _B	D _B
PM	Disease incidence	1,68E-07	4,74E-09	6,64E-09	3,04E-13	9,15E-12	2,90E-12	6,65E-10	0,00E+00	-1,65E-07
IRP	kBq U235 eq.	1,94E-01	4,46E-03	6,25E-03	5,82E-07	3,20E-04	2,73E-06	3,59E-05	0,00E+00	-1,99E-01
ETP-fw	CTUe	6,51E-01	3,73E-02	5,22E-02	1,39E-06	7,81E-05	2,28E-05	7,63E-03	0,00E+00	-6,78E-01
HTP-c	CTUh	1,41E-08	1,60E-11	2,25E-11	5,46E-15	2,24E-13	9,83E-15	1,12E-11	0,00E+00	-1,41E-08
HTP-nc	CTUh	1,77E-07	1,02E-09	1,42E-09	6,32E-14	3,61E-11	6,23E-13	4,38E-10	0,00E+00	-1,78E-07
SQP	Pt	6,55E+00	1,33E+00	1,86E+00	3,56E-06	4,60E-04	8,20E-04	1,04E-02	0,00E+00	-7,83E+00

PM: Particulate matter emissions; **IRP:** Ionizing radiation, human health; **ETP-fw:** Ecotoxicity (freshwater); **ETP-c:** Human toxicity, cancer effects; **HTP-nc:** Human toxicity, non-cancer effects; **SQP:** Land use related impacts / soil quality

Resource use

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _B	C2 _B	C3 _B	C4 _B	D _B
RPEE	MJ	1,99E+00	8,71E-03	1,22E-02	5,90E-07	2,09E-03	5,34E-06	1,70E-04	0,00E+00	-1,99E+00
RPEM	MJ	5,67E-01	2,49E-03	3,49E-03	2,77E-07	3,10E-04	1,53E-06	7,64E-05	0,00E+00	-5,59E-01
TPE	MJ	2,56E+00	1,12E-02	1,57E-02	8,67E-07	2,40E-03	6,87E-06	2,50E-04	0,00E+00	-2,55E+00
NRPE	MJ	3,02E+01	8,32E-02	1,17E-01	7,82E-06	1,10E-02	5,10E-05	2,04E-03	0,00E+00	-2,98E+01
NRPM	MJ	1,10E+01	8,04E-01	1,13E+00	1,20E-04	2,81E-03	4,90E-04	7,69E-03	0,00E+00	-1,02E+01
TRPE	MJ	4,12E+01	8,87E-01	1,24E+00	1,30E-04	1,39E-02	5,40E-04	9,73E-03	0,00E+00	-4,00E+01
SM	kg	4,66E-01	7,80E-04	1,09E-03	8,88E-08	1,50E-04	4,77E-07	2,34E-05	0,00E+00	-4,67E-01
RSF	MJ	9,66E-02	2,20E-04	3,10E-04	7,92E-09	8,37E-05	1,34E-07	2,58E-06	0,00E+00	-9,68E-02
NRSF	MJ	1,25E-01	6,60E-04	9,30E-04	1,49E-08	5,61E-05	4,07E-07	6,76E-06	0,00E+00	-1,26E-01
W	m ³	2,88E-02	1,10E-04	1,50E-04	7,81E-09	1,01E-05	6,58E-08	3,82E-05	0,00E+00	-2,67E-02

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Nonrenewable primary energy resources used as energy carrier; NRPM Nonrenewable primary energy resources used as materials; TRPE Total use of nonrenewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of nonrenewable secondary fuels; W Use of net fresh water

End of life - Waste

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _B	C2 _B	C3 _B	C4 _B	D _B
HW	KG	7,04E+00	1,79E-02	2,50E-02	1,72E-06	2,73E-03	1,10E-05	6,50E-04	0,00E+00	-7,05E+00
NHW	KG	3,47E-01	8,21E-02	1,15E-01	2,24E-07	3,45E-05	5,04E-05	1,82E-02	0,00E+00	-4,26E-01
RW	KG	1,91E-03	1,65E-05	2,31E-05	1,45E-09	3,43E-06	1,01E-08	1,89E-07	0,00E+00	-1,93E-03

HW Hazardous waste disposed; NHW Nonhazardous waste disposed; RW Radioactive waste disposed

End of life – output flow

Parameter	Unit	A1-A3	A4 _{EUR}	A4 _{PORT}	A4 _{SEA} /km	C1 _B	C2 _B	C3 _B	C4 _B	D _B
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,81E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	4,68E-01	6,10E-04	8,50E-04	7,96E-08	1,40E-04	3,74E-07	1,07E-05	0,00E+00	-4,69E-01
MER	kg	3,69E-03	1,90E-04	2,70E-04	5,17E-08	7,78E-07	1,17E-07	4,33E-06	0,00E+00	-3,87E-03
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ETE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,81E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

Information common for both scenarios

Classification of disclaimers to the declaration of core and additional environmental impact indicators

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
	Acidification potential, Accumulated Exceedance (AP)	None
ILCD type / level 2	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD type / level 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
<p>Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials are also not measured by this indicator.</p> <p>Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator</p>		

Information describing the biogenic carbon content at the factory gate

Biogenic carbon content	Unit	Value
Biogenic carbon content in product	kg C	0
Biogenic carbon content in the accompanying packaging	g C	2

Additional Norwegian requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3). This is supplemented by local production from solar PV.

Electricity system	Unit	Value
Germany national electricity grid	kg CO ₂ -eq/kWh	0,5286
Roof-mounted solar PV	kg CO ₂ -eq/kWh	0,0717
Sikla electricity use	kg CO ₂ -eq/kWh	0,4429

Additional environmental impact indicators required in NPCR Part A for construction products

To increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is referred to as GWP-GHG in context to Swedish public procurement legislation.

Indicator	Unit	A1-A3	
GWP-IOBC	kg CO ₂ eq.	3,28E+00	

GWP-IOBC Global warming potential calculated according to the principle of instantaneous oxidation.

Hazardous substances

The declaration is based upon reference to threshold values and/or test results and/or material safety data sheets provided to EPD verifiers. Documentation available upon request to EPD owner.

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contains dangerous substances, more than 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskriften, Annex III), see table.

Indoor environment






The product meets the requirements for low emissions.

Carbon footprint

Carbon footprint has not been prepared for the product.

Bibliography

ISO 14025:2010	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products
ISO 21930:2007	Sustainability in building construction - Environmental declaration of building products
Ciroth & Barrieros, 2022	The EN15804 add-on for ecoinvent by GreenDelta. GreenDelta GmbH, Kaiserdamm 13, 14057 Berlin
Samson and Mejer, 2001	Life Cycle Assessment (LCA) of steel construction. European Commission technical steel research
Soldal and Modahl, 2022	A review of standards and frameworks for reporting of biogenic CO2. Open version.

 Global Program Operator	Program Operator	Tel.:	+47 23 08 80 00
	The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	E-Mail:	post@epd-norge.no
		Web:	www.epd-norge.no
 Global Program Operator	Publisher	Tel.:	+47 23 08 80 00
	The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	E-Mail:	post@epd-norge.no
		Web:	www.epd-norge.no
	Owner of the declaration	Tel.:	+49 7720 948 0
	Sikla GmbH In der Lache 17 D-78056 Villingen-Schwenningen	Fax:	+49 7720 948 337
		E-Mail:	info@sikla.de
		Web:	www.sikla.com
	Author of the life cycle assessment	Tel.:	+47 98 25 90 10
	Energiråd AS Trippevegen 1, 6009 Ålesund Norway	E-Mail:	harald@energirad.no
		Web:	www.energirad.no
	ECO Platform ECO Portal	Web:	www.eco-platform.org
		Web:	ECO Portal

EPD for the best environmental decision



Global
Program
Operator