



EPD

# **Environmental Product Declaration**

Indoor Current Transformer TPU 60.13 300-600//1/1 A

Production site: Brno, Czech Republic



DOCUMENT KIND	IN COMPLIANCE WITH				
Environmental Product Declaration	ISO 14025 and EN 50693				
PROGRAM OPERATOR	PUBLISHER				
The Norwegian EPD Foundation	The Norwegian EPD Foundation				
REGISTRATION NUMBER OF THE PROGRAM OPERATOR	ISSUE DATE				
NEPD-7653-7016-EN	2024/09/24				
VALID TO	STATUS	STATUS SECURITY LEVEL			
2029-09-24	Approved	Approved Public			
OWNING ORGANIZATION	ABB DOCUMENT ID	REV.	LANG.	PAGE	
ABB Switzerland Ltd, Group Technology Management	1VLG101258 A EN 1/18				
© Copyright 2024 ABB. All rights reserved.	'				

EPD Owner	ABB Switzerland Ltd, Group Technology Management
Organization No.	CHE-101.538.426
Manufacturer name	ABB, s.r.o
and address	Vídenská 117, Brno 619 00, Czech Republic
Company contact	Václav Prokop – vaclav.prokop@cz.abb.com Global Product Manager
Program operator	The Norwegian EPD Foundation
riogiam operator	Post Box 5250 Majorstuen, 0303 Oslo, Norway
	phone: +47 23 08 80 00, email: post@epd-norge.no
Declared product	Indoor Current Transformer TPU 60.13 300-600//1/1 A
Product	The TPU 60.13 insulated current transformer is casted in epoxy resin and designed
description	mostly for insulation voltage up to 24 kV.
Functional unit	The functional unit in this study is to measure and protect an energy distribution
	system is measurement and protection functionalities for energy distribution (the system voltage up to 24 kV) during a service life of 20 years and with a use rate of 100 %.
Reference flow	Indoor current transformer TPU 60.13 300-600//1/1 A, including related accessories and packaging.
Independent verification	Independent verification of the declaration and data, according to ISO 14025:2010
	□ INTERNAL ⊠ EXTERNAL
	Independent verifier approved by EPD-Norge: Elisabet Amat
	Signature:
Approved by	Håkon Hauan, CEO EPD-Norge
	cinnature 1/1 / _
	Signature: Haten Hauren
Reference PCR	EN 50693:2019 – Product Category Rules for Life Cycle Assessments of Electronic
	and Electrical Products and Systems.
	EPDItaly007 – Electronic and Electrical Products and Systems, Rev. 3.0, 2023/01/13. EPDItaly015 – Electronic and Electrical Products and Systems – Switchboards, Rev.
	1.5, 2022/02/23.
Program	The Norwegian EPD Foundation/EPD-Norge, General Programme Instructions 2019,
instructions	Version 3.0, 2019/04/24.
LCA study	This EPD is based on the LCA study described in the LCA report 1VLG101169.
EPD type	Specific product by a specific manufacturer
EPD scope	Cradle-to-grave
Product RSL	20 years, this is a theoretical period selected for calculation purposes only and it is not
	representative for the minimum, average, nor actual service life of the product
Geographical	Manufacturing (suppliers): Manufacturing (ABB): Downstream:
representativeness	Global Czech Republic Europe
Reference year	2023
LCA software	SimaPro 9.5 (2023)
LCI database	Ecoinvent v3.9.1 (2022)
Comparability	EPDs published within the same product category, though originating from different
	programs, may not be comparable. Full conformance with a PCR allows EPD
	comparability only when all stages of a life cycle have been considered. However,
Liability	variations and deviations are possible.
LIADIUTY	The owner of the declaration shall be liable for the underlying information and
Liability	
Liability	evidence. EPD-Norge shall not be liable with respect to manufacturer, life cycle assessment data, and evidence.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	Α	EN	2/18
© Convigint 2024 ARR All rights reserved					

## **Contents**

Sustainability at ABB	4
General Information	
Constituent Materials	
LCA Background Information	
Inventory Analysis	
Environmental Indicators	12
Additional Environmental Information	17
References	18



# Sustainability at ABB

ABB is a leading global technology company that energizes the transformation of society and industry to achieve a more productive, sustainable future. By connecting software to its electrification, robotics, automation, and motion portfolio, ABB pushes the boundaries of technology to drive performance to new levels.

At ABB, we actively contribute to a more sustainable world, leading by example in our own operations and partnering with customers and suppliers to enable a low-carbon society, preserve resources, and promote social progress.



Learn more on our website <u>global.abb/group/en/sustainability</u> or scan the QR code.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	A	EN	4/18



## **General Information**

The product declared in this Environmental Product Declaration is the indoor current transformer TPU 60.13 300-600//1/1 A, including related accessories and packaging.

The instrument current transformer TPU 60.13 is a measuring and protecting device which is standardly used in medium voltage indoor switchgears for transforming high primary current into low current on secondary side which can be safely used controlling and monitoring in relay devices. Most common type of switchgear is UniGear ZS1.

General technical specifications of the product are presented below.

Technic	cal information	
	Unit	Value
Outer height/width/length	mm	340/178/355
Highest voltage for equipment	kV	24/50/125
Rated primary	V	300 - 600
Rated secondary	V	1/1
Accuracy class	-	0.5SFS5 / 5P10
Rated output	VA	10-10 / 10-10
Frequency	Hz	50
Rated short-time thermal current	kA/s	25/3

The production of the instrument transformers, from which medium indoor current transformer TPU 60.13 is part of, is located in the ABB Brno Videnska factory. The instrument transformers are produced and assembled directly in the ABB factory combined with components produced by ABB's suppliers.

ABB Brno ELDS adopts and implements for its own activities an integrated Quality/Environmental/Health Management System in compliance with the following standards:

- UNI EN ISO 9001:2015 Quality Management Systems- Requirements
- UNI EN ISO 14001:2015 Environmental Management Systems
- UNI EN ISO 45001:2018 Occupational Health and Safety Management system

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	A	EN	5/18
© Copyright 2024 ABB. All rights reserve	d.				




# **Constituent Materials**

The constituent materials of TPU 60.13 300-600//1/1 A are presented below.

Materials	Name	Weight [kg]	Weight [%]
Metals	Brass	0.839	2.57
	Copper	2.739	8.40
	Steel	7.698	23.59
Plastics and Rubbers	PET	0.173	0.53
	PUR	0.951	2.91
	Other polymers	0.117	0.36
	Rubber	0.074	0.23
Others	Epoxy resin	18.76	57.53
	Others	1.266	3.88
Total		32.625	100

# TPU 60.13 300-600//1/1 A

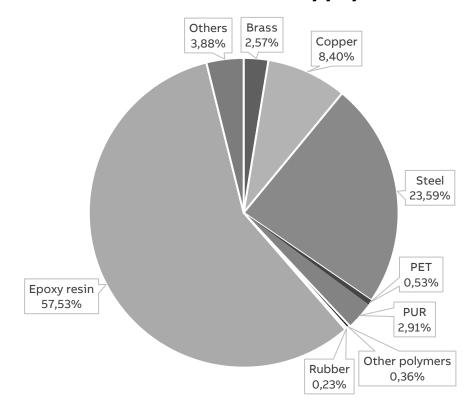

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	Α	EN	6/18
© Convigible 2024 ARR All rights reserved					

The packaging materials and accessories weigh 4.86 kg, and the constituent materials are presented below.

Description	Material	Weight [kg]	Weight [%]
Metals	Aluminum	0.005	0.11
Metais	Steel	0.227	4.66
Plastics and Rubbers	Polymers	0.114	2.34
Plastics and Rubbers	Rubber	0.006	0.13
Wooden base materials	Wood (pallet + case)	4.464	91.82
Unit test report	Paper	0.005	0.10
Others	Cardboard	0.040	0.83
Total		4.861	100

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	Α	EN	7/18
@ Consider 2024 ADD All sinks assessed					



## **LCA Background Information**


#### **Functional Unit**

The functional unit of this study is to measure and protect an energy distribution system (the system voltage up to 24 kV), during a service life of 20 years and with a use rate of 100 %. The reference flow is an indoor current transformer TPU 60.13 300-600//1/1 A casted in epoxy resin, including related accessories and packaging.

Note, the reference service life (RSL) of 20 years is a theoretical period selected for calculation purposes only - this is not representative for the minimum, average, nor actual service life of the product.

#### System Boundaries

The life cycle assessment of the TPU 60.13, an EEPS (Electronic and Electrical Products and Systems), is a "cradle-to-grave" analysis. The figure below shows the product life cycle stages and the information considered in the LCA.

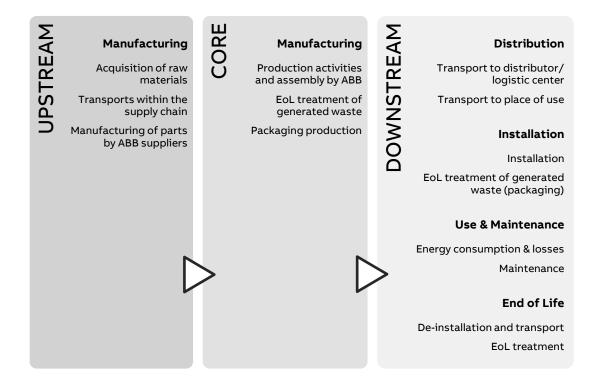

## **Data quality**

Both primary and secondary data are used. The main sources for primary data are the bill of materials and technical drawings, while site specific foreground data are provided by ABB. Furthermore, information and data obtained from other LCA studies are also used.

For all processes for which primary data are not available, generic data originating from the ecoinvent v3.9.1 database, "allocation, cut-off by classification", are used. The LCA software used for the calculations is SimaPro 9.5.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	Α	EN	8/18
© Copyright 2024 ABB. All rights reserved.					

#### **Allocation rules**

The utility consumption and waste generation by ABB, in the core manufacturing stage, is allocated to the production of one reference product according to applicable rules. For the end-of-life allocation, the "Polluter Pays" principle is adopted according to what is defined in the CEN/TR 16970 standard. However, the potential benefits and avoided loads from recovery and recycling processes are not considered because it is not required by the PCR.

#### **Cut-off** criteria

The materials that were excluded are glue, and adhesive, as their mass represents less than 2% of that of the whole product, as stated in the paragraph of cut-off criteria of EPDItaly015: "Materials making up the transformer itself whose total mass does not exceed 2% of the total weight of the device".

The same applies for tape and labels used in packaging, which are even a smaller fraction of the total mass.

Sandblasting of capacitors and phosphating were also excluded due to the model complexity and unavailability of reference data.

Approved	Public	1VLG101258	A	EN	9/18
STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE



## **Inventory Analysis**

#### Manufacturing Stage (upstream)

The life cycle inventory in the upstream manufacturing stage is based on the primary data available from ABB. Datasets are applied accordingly, to the best of our knowledge, to represent each material, manufacturing process, and surface treatment. Modelling decisions and assumptions that are highly relevant to the results are as following:

- All steel components (hot rolled steel, spring steel, stainless steel) are modelled with the same kind of steel: "Steel, low-alloyed [GLO] | market for | Cut-off, S", as it is representative for the large majority of the steel parts. Stainless steel is only used for a small number of screws and due to lack of data they are modelled using one type of steel.
- Epoxy is modelled on a chemical level, i.e., each chemical used is considered and mapped with the most representative dataset available.
- To account for the production activities of metal and plastic parts, Metal working, average and Injection molding are the most frequently used processes. Surface treatments are also included, and the most common surface treatments are ABB Zinc coat, pieces (GLO) SMP V1 and ABB Tin plating, pieces (GLO) SMP V1.

Additionally, supply chain transports are added as far as data is available between ABB, the suppliers, and sub-suppliers. Only primary suppliers are considered. The rest of the transports are assumed to already be included in ecoinvent's "market for"-processes. The selected ecoinvent processes are Transport, freight, lorry 16-32 metric ton, EURO4 {RER} for lorry and transport, freight, sea, container ship {GLO} for sea transport.

## **Manufacturing Stage (core)**

In the core manufacturing stage, utility consumption and waste generation at the ABB manufacturing site are accounted for. The packaging materials and accessories associated with the product are also considered. The energy mix used for the production is representative for ABB Videnska factory based on the guarantee of origin (GO) energy certificate. This dataset includes electricity inputs produced in this country and from imports and transformed to medium voltage, the transmission voltage, direct emissions to air and electricity losses during transmission.

#### Distribution

The transport distance from ABB's plant to the site of installation is assumed to be 300 km over land, as suggested by the PCR EPDItaly015, as the actual distance is unknown. The selected ecoinvent process is Transport, freight, lorry 16-32 metric ton, euro4 [RER]/ market for transport, freight, lorry 16-32 metric ton, EURO4 / Cut-off, S, and the scenario is representative for Europe.

#### Installation

The installation phase only implies manual activities, and no energy is consumed. Therefore, this phase only considers the end-of-life of the packaging materials used.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE			
Approved	Public	1VLG101258	Α	EN	10/18			
© Convright 2024 ABR All rights reserved								

	Scenario	Transport	Representation
Packaging End-of-Life	Packaging waste by waste management operations (Eurostat, 2021)*	100 km by lorry (assumption)	Europe

<sup>\*</sup>Due to lack of data from Eurostat, 100% landfill is assumed for ceramics (e.g., bentonite)

#### Use

The use stage considers the losses in the magnetic core (magnetic core) and joule losses in the resistance of the primary and secondary coils over the reference service life of 20 years as defined in the functional unit. This is calculated using the following formula, according to the PCR EPDItaly015 "Electronic and electrical products and systems -Switchboards" which defines specific rules for major product family the functional unit is used in:

$$\Delta P_{use} = \Delta P_F + \Delta P_J = 0.15 + 27.84 = 27.99 W$$

$$E_{use} = \frac{\Delta P_{use} * 8760 * RSL}{1000} = \frac{27.99 * 8760 * 20}{1000} = 4 903.9 \ kWh$$

#### Where:

- $E_{use}$  = Total energy use over the reference service life
- $\Delta P_{use}$  = Reference power consumption in watts
- $\Delta P_{I}$  = Joule losses in the primary and secondary coils
- $\Delta P_F$  = Losses in all magnetic cores
- RSL = Reference Service Life in years
- $\alpha$  = Use time rate
- 8760 is the number of hours in a year
- 1000 is the conversion factor from W to kW

Because this product is sold globally and is not limited to any specific country, the latest energy mix of the European Union is adopted as suggested by the standard EN 50693. The emission factor of the energy mix is presented below.

Energy mix	Source	Amount	Unit
Electricity, medium voltage {RER}  market group for   Cut-off, S	Ecoinvent v3.9.1	0.361	kg CO <sub>2</sub> -eq/kWh

Since no maintenance happens during the use phase, the environmental impacts linked to this procedure are omitted from the analysis.

#### **End of life**

Decommissioning of the product only implies manual activities, and no energy is consumed. Therefore, this phase only considers the end-of-life of the product.

	Scenario	Transport	Representation
Product End-of-Life	IEC/TR 62635 (Annex D.3)*	100 km by lorry (assumption)	Europe

<sup>\*</sup>A conservative approach is adopted by considering all parts as either: requiring selective treatment, difficult to process, or going through a separation process; no individual part is considered as a single recyclable material. Also, due to the transformer containing parts difficult to process through separation, these are all modelled as 100 % waste to landfill to represent the typical waste streams within Europe.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE		
Approved	Public	1VLG101258	А	EN	11/18		
© Convright 2024 ABR All rights reserved							



# **Environmental Indicators**

In accordance with the PCR EPDItaly007, the environmental impact indicators are determined by using the characterization factors and impact assessment methods specified in EN 15804:2012+A2:2019.

## TPU 60.13 300-600//1/1 A

			Cradle-	to-gate						
					Cradle-t	o-grave				
Impact	Unit	Total	UPSTREAM	CORE		DOWNSTREAM				
category	Onit	iotai	Manufa	cturing	Distribution	Installation	Use and maintenance	End-of-life		
GWP – total	kg CO₂ eq.	1.94E+03	1.50E+02	1.04E+01	2.11E+00	2.41E+00	1.77E+03	3.58E+00		
GWP – fossil	kg CO₂ eq.	1.88E+03	1.53E+02	1.73E+01	2.10E+00	2.85E-01	1.71E+03	2.62E+00		
GWP – biogenic	kg CO₂ eq.	5.51E+01	-3.94E+00	-6.93E+00	1.91E-03	2.12E+00	6.29E+01	9.60E-01		
GWP – luluc	kg CO₂ eq.	5.32E+00	1.01E+00	4.11E-02	1.03E-03	8.20E-05	4.27E+00	3.78E-03		
ODP	kg CFC-11 eq.	3.97E-05	7.82E-06	1.17E-06	4.61E-08	3.12E-09	3.07E-05	2.93E-08		
АР	mol H+ eq.	1.18E+01	3.06E+00	1.23E-01	8.71E-03	8.34E-04	8.56E+00	1.32E-02		
EP – freshwater	kg P eq.	1.81E+00	2.43E-01	5.12E-03	1.48E-04	2.38E-05	1.56E+00	8.79E-04		
EP – marine	kg N eq.	2.04E+00	4.46E-01	3.83E-02	3.32E-03	9.99E-04	1.52E+00	2.54E-02		
EP – terrestrial	mol N eq.	1.74E+01	3.39E+00	4.89E-01	3.55E-02	3.56E-03	1.34E+01	3.45E-02		
POCP	kg NMVOC eq.	5.46E+00	9.93E-01	1.16E-01	1.27E-02	1.18E-03	4.33E+00	1.10E-02		
ADP – minerals and metals	kg Sb eq.	4.42E-02	4.07E-02	1.44E-04	6.80E-06	5.15 <b>E</b> -07	3.39E-03	1.83E-05		
ADP – fossil	MJ, net calorific value	4.19E+04	2.36E+03	2.17E+02	3.00E+01	2.17E+00	3.93E+04	3.32E+01		
WDP	m³ eq.	6.28E+02	2.21E+02	5.17E+00	1.22E-01	1.16E-02	4.01E+02	4.25E-01		

GWP-fossil: Global Warming Potential fossil; GWP-biogenic: Global Warming Potential biogenic; GWP-luluc: Global Warming Potential land use and land use change; ODP: Depletion potential of the stratospheric ozone layer; AP: Acidification potential; EP-freshwater: Eutrophication potential-freshwater compartment; EP-marine: Eutrophication potential-marine compartment; EP-terrestrial: Eutrophication potential-accumulated exceedance; POCP: Formation potential of tropospheric ozone; ADP-minerals & metals: Abiotic Depletion for non-fossil resources potential; ADP-fossil: Abiotic Depletion for fossil resources potential; WDP: Water deprivation potential.

STATUS Approved	SECURITY LEVEL Public	DOCUMENT ID. 1VI G101258	REV.	LANG. EN	PAGE 12/18
Approved	i done	1120101230	<u>r</u>	L'1	12/10

			Cradle-	to-gate				
					Cradle-t	o-grave		
Resource use	Unit	Total	UPSTREAM	CORE		DOWNS	STREAM	
parameters	Oilit	Total	Manufa	Manufacturing		Installation	Use and maintenance	End-of-life
PENRE	MJ, low cal. value	4.16E+04	2.05E+03	2.12E+02	3.00E+01	2.17E+00	3.93E+04	3.32E+01
PERE	MJ, low cal. value	8.55E+03	2.93E+02	7.19E+02	4.66E-01	4.75E-02	7.54E+03	3.07E+00
PENRM	MJ, low cal. value	3.09E+02	3.04E+02	4.94E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERM	MJ, low cal. value	1.01E+02	3.35E+01	6.79E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ, low cal. value	4.19E+04	2.36E+03	2.17E+02	3.00E+01	2.17E+00	3.93E+04	3.32E+01
PERT	MJ, low cal. value	8.66E+03	3.27E+02	7.87E+02	4.66E-01	4.75E-02	7.54E+03	3.07E+00
FW	m³	3.87E+01	7.77E+00	1.70E-01	4.28E-03	4.59E-04	3.07E+01	1.54E-02
MS	kg	3.57E+00	3.44E+00	1.29E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	МЈ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	МЈ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

PENRE: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw material; PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw material; PENRM: Use of nonrenewable primary energy resources used as raw material; PERM: Use of renewable primary energy resources used as raw material; PENRT: Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); PERT: Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); FW: Net use of fresh water; MS: Use of secondary materials; RFS: Use of renewable secondary fuels; NRSF: Use of non-renewable secondary fuels.

			Cradle-	to-gate				
					Cradle-t	o-grave		
System output	Unit	Total	UPSTREAM	CORE		DOWNS	STREAM	
indicators	ators	Total	Manufa	cturing	Distribution	Installation	Use and maintenance	End-of-life
HWD	kg	1.11E-01	5.93E-02	1.87E-03	1.91E-04	1.25E-05	4.97E-02	1.17E-04
NHWD	kg	1.79E+02	3.24E+01	4.81E+00	1.47E+00	1.87E+00	1.08E+02	3.09E+01
RWD	kg	2.89E-01	3.23E-03	3.35E-04	9.75E-06	9.20E-07	2.86E-01	5.97E-05
MER	kg	1.60E+00	0.00E+00	2.08E-01	0.00E+00	1.39E+00	0.00E+00	1.85E-03
MFR	kg	6.82E+00	9.86E-01	1.75E+00	0.00E+00	1.70E+00	0.00E+00	2.38E+00
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	МЈ	6.50E+00	0.00E+00	5.93E-01	0.00E+00	5.89E+00	0.00E+00	1.62E-02
EEE	МЈ	3.57E+00	0.00E+00	2.89E-01	0.00E+00	3.27E+00	0.00E+00	9.01E-03

HWD: hazardous waste disposed; NHWD: non-hazardous waste disposed; RWD: radioactive waste disposed; MER: materials for energy recovery; MFR: material for recycling; CRU: components for reuse; ETE: exported thermal energy; EEE: exported electricity energy.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE		
Approved	Public	1VLG101258	Α	EN	13/18		
© Convigint 2024 ARR All rights received							



## Sensitivity analysis

This chapter presents the results of a sensitivity analysis, to understand how the impact category "GWP – total" varies in different scenarios. A theoretical waste scenario has been evaluated, where is assumed that all the components of the transformer are recycled according to the single material recyclability of IEC/TR 62635 (Annex D.3), a recyclability potential of up to 31.79 % can be achieved.

Indicators Unit	Total	UPSTREAM	CORE		DOWN	STREAM		
maicators	Onit	TOLAI	Manufacturing [		Distribution	Installation	Use and maintenance	End-of-life
GWP – total	kg CO₂ eq.	1.94E+03	1.50E+02	1.04E+01	2.11E+00	2.41E+00	1.77E+03	5.52E+00
MFR	kg	1.48E+01	9.86E-01	1.75E+00	0.00E+00	1.70E+00	0.00E+00	1.04E+01

Sensitivity analysis is added to understand how a different operating ratio affects environmental impact during use stage.

Calculations for specific configuration TPU 60.13 300-600//1/1 A with reduced ratio 300//1/1 A:

$$\Delta P_{use} = \Delta P_F + \Delta P_J = 0.15 + 8.367 = 8.517 W$$

$$E_{use} = \frac{\Delta P_{use} * 8760 * RSL}{1000} = \frac{8.517 * 8760 * 20}{1000} = 1 \text{ 492.27 } kWh$$

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	A	EN	14/18

## TPU 60.13 with reduced ratio 300//1/1 A

			Cradle-1	to-gate					
					Cradle-t	o-grave			
Impact	Unit	it Total	UPSTREAM	CORE		DOWNS	NSTREAM		
category	Omt	Total	Manufa	cturing	Distribution	Installation	Use and maintenance	End-of-life	
GWP – total	kg CO₂ eq.	7.09E+02	1.50E+02	1.04E+01	2.11E+00	2.41E+00	5.40E+02	3.58E+00	
GWP – fossil	kg CO₂ eq.	6.95E+02	1.53E+02	1.73E+01	2.10E+00	2.85E-01	5.19E+02	2.62E+00	
GWP – biogenic	kg CO₂ eq.	1.14E+01	-3.94E+00	-6.93E+00	1.91E-03	2.12E+00	1.92E+01	9.60E-01	
GWP – luluc	kg CO₂ eq.	2.35E+00	1.01E+00	4.11E-02	1.03E-03	8.20E-05	1.30E+00	3.78E-03	
ODP	kg CFC-11 eq.	1.84E-05	7.82E-06	1.17E-06	4.61E-08	3.12E-09	9.33E-06	2.93E-08	
АР	mol H+ eq.	5.81E+00	3.06E+00	1.23E-01	8.71E-03	8.34E-04	2.61E+00	1.32E-02	
EP – freshwater	kg P eq.	7.23E-01	2.43E-01	5.12E-03	1.48E-04	2.38E-05	4.74E-01	8.79E-04	
EP – marine	kg N eq.	9.77E-01	4.46E-01	3.83E-02	3.32E-03	9.99E-04	4.63E-01	2.54E-02	
EP – terrestrial	mol N eq.	8.04E+00	3.39E+00	4.89E-01	3.55E-02	3.56E-03	4.09E+00	3.45E-02	
POCP	kg NMVOC eq.	2.45E+00	9.93E-01	1.16E-01	1.27E-02	1.18E-03	1.32E+00	1.10E-02	
ADP – minerals and metals	kg Sb eq.	4.19E-02	4.07E-02	1.44E-04	6.80E-06	5.15E-07	1.03E-03	1.83E-05	
ADP – fossil	MJ, net calorific value	1.46E+04	2.36E+03	2.17E+02	3.00E+01	2.17E+00	1.19E+04	3.32E+01	
WDP	m³ eq.	3.49E+02	2.21E+02	5.17E+00	1.22E-01	1.16E-02	1.22E+02	4.25E-01	

GWP-fossil: Global Warming Potential fossil; GWP-biogenic: Global Warming Potential biogenic; GWP-luluc: Global Warming Potential land use and land use change; ODP: Depletion potential of the stratospheric ozone layer; AP: Acidification potential; EP-freshwater: Eutrophication potential-freshwater compartment; EP-marine: Eutrophication potential-marine compartment; EP-terrestrial: Eutrophication potential-accumulated exceedance; POCP: Formation potential of tropospheric ozone; ADPminerals & metals: Abiotic Depletion for non-fossil resources potential; ADP-fossil: Abiotic Depletion for fossil resources potential; WDP: Water deprivation potential.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE	
Approved	Public	1VLG101258	Α	EN	15/18	
© Copyright 2024 ARR All rights recoved						

			Cradle-to-gate					
					Cradle-t	o-grave		
Resource use	Unit	Total	UPSTREAM	CORE		DOWNS	STREAM	
parameters	Onic	Total	Manufa	cturing	Distribution Installation Use and maintena			End-of-life
PENRE	MJ, low cal. value	1.43E+04	2.05E+03	2.12E+02	3.00E+01	2.17E+00	1.19E+04	3.32E+01
PERE	MJ, low cal. value	3.31E+03	2.93E+02	7.19E+02	4.66E-01	4.75E-02	2.29E+03	3.07E+00
PENRM	MJ, low cal. value	3.09E+02	3.04E+02	4.94E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERM	MJ, low cal. value	1.01E+02	3.35E+01	6.79E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ, low cal. value	1.46E+04	2.36E+03	2.17E+02	3.00E+01	2.17E+00	1.19E+04	3.32E+01
PERT	MJ, low cal. value	3.41E+03	3.27E+02	7.87E+02	4.66E-01	4.75E-02	2.29E+03	3.07E+00
FW	m³	1.73E+01	7.77E+00	1.70E-01	4.28E-03	4.59E-04	9.34E+00	1.54E-02
MS	kg	3.57E+00	3.44E+00	1.29E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	МЭ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	МЈ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

PENRE: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw material; PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw material; PENRM: Use of nonrenewable primary energy resources used as raw material; PERM: Use of renewable primary energy resources used as raw material; PENRT: Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); PERT: Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); FW: Net use of fresh water; MS: Use of secondary materials; RFS: Use of renewable secondary fuels; NRSF: Use of non-renewable secondary fuels.

	Cradle-to-gate							
					Cradle-t	o-grave		
System output	Unit	Total	UPSTREAM	CORE		DOWNS	STREAM	
indicators	Onic	Total	Manufa	cturing	Distribution	Installation	Use and maintenance	End-of-life
HWD	kg	7.66E-02	5.93E-02	1.87E-03	1.91E-04	1.25E-05	1.51E-02	1.17E-04
NHWD	kg	1.04E+02	3.24E+01	4.81E+00	1.47E+00	1.87E+00	3.28E+01	3.09E+01
RWD	kg	9.06E-02	3.23E-03	3.35E-04	9.75E-06	9.20E-07	8.70E-02	5.97E-05
MER	kg	1.60E+00	0.00E+00	2.08E-01	0.00E+00	1.39E+00	0.00E+00	1.85E-03
MFR	kg	6.82E+00	9.86E-01	1.75E+00	0.00E+00	1.70E+00	0.00E+00	2.38E+00
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	МЈ	6.50E+00	0.00E+00	5.93E-01	0.00E+00	5.89E+00	0.00E+00	1.62E-02
EEE	МЈ	3.57E+00	0.00E+00	2.89E-01	0.00E+00	3.27E+00	0.00E+00	9.01E-03

HWD: hazardous waste disposed; NHWD: non-hazardous waste disposed; RWD: radioactive waste disposed; MER: materials for energy recovery; MFR: material for recycling; CRU: components for reuse; ETE: exported thermal energy; EEE: exported electricity energy.

	LANG.	PAGE
Α	EN	16/18
_	A	A EN



# Additional Environmental Information

#### **Circularity Values**

The recyclability potential of the product (excluding packaging) is calculated by dividing "MFR: material for recycling" in the end-of-life stage by the total weight of the product. As a result, the recyclability potential of the product 8.73 %. The result is representative for Europe according to IEC/TR 62635.

	Recyclability potential
TPU 60.13	8.73 %

However, according to the theoretical end-of-life scenario shown in the Sensitivity Analysis chapter, where is assumed that all the components of the transformer are recycled according to single material recyclability of IEC/TR 62635 (Annex D.3), a recyclability potential of up to 31.79 % can be achieved.

## Greenhouse gas emissions from the use of electricity in the manufacturing phase

Production mix from import, medium voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process.

Energy mix	Source	Amount	Unit
ABB_Electricity mix CZ factory {CZ}_biomass49%_PV30%_Wind21%_2023  S_SMP_V1	Ecoinvent v3.9.1	0.068	kg CO₂- eq/kWh

#### **Dangerous substances**

The product complies with REACH and RoHS directive requirements and does not contain any of the listed materials in excess of the authorized proportions.

For further information about REACH and RoHS, please visit the ABB webpage: https://new.abb.com/contact/form

#### Indoor environment

The product meets the requirements for low emissions.

#### Carbon footprint

Carbon footprint has not been worked out for the product.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE	
Approved	Public	1VLG101258	Α	EN	17/18	
© Convright 2024 ARR All rights reserved						



## References

Vybiralova N., Zoufala A. (2024). *Life Cycle Assesment Report: TPU 60.13 300-600//1/1 A (Report No. 1VLG101169 rev A*). ABB Switzerland Ltd, Group Technology Management

ecoinvent. ecoinvent v3.9.1 (2022). https://ecoinvent.org/the-ecoinvent-database/data-releases/ecoinvent-3-9-1/

European Committee for Standardization. (2019). *Product category rules for life cycle assessments of electronic and electrical products and systems* (EN 50693:2019).

European Committee for Standardization. (2019). Sustainability of constructions - Environmental product declarations (EN 15804:2012+A2:2019).

Eurostat. (2021). Packaging waste by waste management operations.

https://ec.europa.eu/eurostat/databrowser/view/ENV\_WASPAC/default/table?lang=en

ICMQ S.p.A. (2023). *PCR EPDItaly007-Electronic and electrical products and systems,* rev. 3.0 (2023-01-13). EPDItaly. https://www.epditaly.it/en/view-pcr/

ICMQ S.p.A. (2022). *PCR EPDItaly015 - Electronic and electrical products and systems - switchboards*, rev. 1.5 (2022-02-23). EPDItaly. https://www.epditaly.it/en/view-pcr/

ICMQ S.p.A (2020b). Regulations of the EPDItaly Programme Regulations, rev. 5.2 (2020-02-16). EPDItaly. https://www.epditaly.it/en/wp-content/uploads/2016/12/EPDITALY-Regulament rev-5.2 EN.pdf

International Electrotechnical Commission. (2012). *Guidelines for end-of-life information provided by manufacturers and recyclers and for recyclability rate calculation of electrical and electronic equipment*, Edition 1.0 (2012-10-1) (IEC/TR 62635).

International Organization for Standardisation. (2006). *Environmental management - Life cycle assessment - Principles and framework* (ISO Standard No. 14040:2006).

https://www.iso.org/standard/37456.html

International Organization for Standardisation. (2006). *Environmental management - Life cycle assessment - Requirements and guidelines* (ISO Standard No. 14044:2006).

https://www.iso.org/standard/38498.html

PRé Sustainability. (2023). SimaPro (version 9.5) [computer software]. https://pre-

sustainability.com/solutions/tools/simapro/

SeaRates. (2022). Shipping Distances & Time Calculator. https://www.searates.com/services/distances-time The Norwegian EPD Foundation/EPD-Norge. (2019). General Programme Instructions 2019, Version 3.0 (2019-04-24). https://www.epd-norge.no/getfile.php/1340010-

1685100696/Dokumenter/GPI%20Det%20norske%20EPD%20programmet%20approved%20240419%20-%20ver3%20updated%20250523.pdf



#### **Program Operator and publisher**

The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway Ph. +47 23 08 80 00 email post@epd-norge.no web www.epd-norge.no



#### Owner of the declaration

ABB Swizerland Ltd, Group Technology Management Brown Boveri Straße 6, 5400

www.abb.com



#### Author

Natalie Vybiralova ABB s.r.o., Videnska 117 619 00 Brno, Czechia

Baden, Switzerland

email n

web

web

natalie.vybiralova@cz.abb.com www.abb.com

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	1VLG101258	A	EN	18/18