



ENVIRONMENTAL PRODUCT DECLARATION

*In accordance with ISO 14025 and
EN 15804:2012+A2:2019/AC:2021 for*

MAPEFORM ECO OIL 700



Publisher: The Norwegian EPD Foundation
Registration number: NEPD-4784-4037-EN

An EPD should provide current information and may be updated if conditions change. The stated validity is, therefore, subject to the continued registration and publication at www.environdec.com.

Programme:
**The International
EPD® System;**
www.environdec.com

Programme
operator:
EPD International AB

EPD registration
number:
S-P-09552

Publication
date:
2023-07-31

Valid until:
2028-07-30

Geographical
scope:
Global




1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floors, wall and coating materials, and also specializes in other chemical products used in the building industry, such as waterproofing products, specialty mortars, admixtures for concrete, cement additives, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 100 subsidiaries in the Mapei Group, with a total of 86 production facilities located around the world in 36 different countries and in 5 different continents. Mapei also has 32 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei invests 12% in its company's total workforce and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which give important contribution to all major green rating systems for eco-sustainable buildings such as LEED and BREEAM.

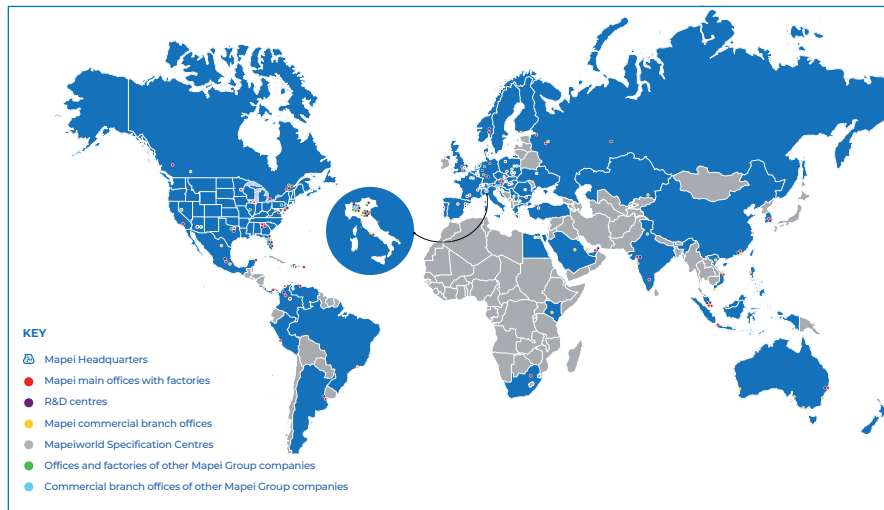

LEED V4.1 is the latest version of Leadership in Environmental and Energy Design, an American protocol that enables buildings to be certified as eco-sustainable according to parameters and credits described in the most widely adopted green building criteria in the world. Issued by the GBC US, it is mandatory for all LEED projects registered after October 2016.

Numerous changes have been made to the previous version: Mapei products play a part in obtaining important credits thanks to their EPD's (type III environmental declarations) and their products with very low emission of VOC.

Launched in the UK in 1990, **BREEAM** (BRE Environmental Assessment Method) is a protocol for sustainable building practices adopted mainly in the United Kingdom and in Scandinavian countries with the version **BREEAM NOR**.

By adopting this protocol, thanks to their EPD's and very low emission of VOC, Mapei products help towards obtaining relative credits.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

Mapei Nordic production site is located in Sagstua, Norway. The production site consists of 5 factories: Two factories for powder-based products, two factories for liquid admixtures and one factory for thermosetting plastic-based products.

The total size of the buildings is 24.000 sqm. The energy in these factories is provided from water electricity, geothermal heating and remaining approximately 10 % heated by bio-oil.

Mapei Nordic focuses both on energy and on logistic optimisation, as for example the systematic Lean based improvement work. With

60 – 80 trailers per day, and 600 transport lines, requires Mapei to work actively on optimizing our logistic process. The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR Environdec (version 1.11, 2021-02-05) under EN 15804:2012+A2:2019/AC:2021 and to have more comprehension about the environmental impacts related to **Mapeform Eco Oil 700** manufactured in Mapei AS located in Sagstua (NO), including packaging of the finished product. Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Mapeform Eco Oil 700**. This analysis shall not support comparative assertions intended to be disclosed to the public.

2. PRODUCT DESCRIPTION

Mapeform Eco Oil 700 is an anti-adhesive treatment of iron, aluminum and plastic forms (epoxy, phenolic, polyester and polyurethane resins). It consists of a stable mixture of selected vegetable oils, corrosion inhibitors and special admixtures developed in the MAPEI research laboratories.

Mapeform Eco Oil 700 features the following advantages:

- Improved surface quality thanks to the drastic reduction of large and micro surface air bubbles.
- Less cleaning of forms.
- Simple low-cost application.
- Easily and rapidly biodegradable; nontoxic, it does not irritate and does not cause sensitization.

Mapeform Eco Oil 700 is ready-to-use and supplied in 1000 l IBC-containers, 200 l drums and 25 l tanks.

For more information about the product see the TDS (Technical Data Sheet) on Mapei AS website (www.mapei.com/NO).

3. CONTENT DECLARATION

The main components and ancillary materials of the product included in this EPD are the following:

Table 1: Composition referred to 1 kg of finished packaged in 1000L IBC

Materials	Percentage (%) by mass
Vegetable oils	<100% (86% biobased)
Corrosion inhibitors	<2%
Packaging*	Percentage (%) by mass
HDPE (IBC)	< 0,5%
Metal (IBC)	< 0,5%
WOOD (IBC)	< 0,5% (0,2% of biogenic C)

The product does not contain a concentration higher than 0,1% (by unit weight) of either carcinogenic substances or substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency.

4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1 kg of finished product with packaging.

Due to the selected system boundary, the reference service life of the product is not specified.

5. SYSTEM BOUNDARIES AND ADDITIONAL TECHNICAL INFORMATION

The approach is “cradle to gate” (A1–A3) with modules C1–C4 and module D and optional modules (A4 – A5):

- A1, A2, A3 (Product stage): extraction and processing of raw materials and packaging (A1), transportation up to the factory gate (A2), manufacturing of the finished product (A3).
- A4 – A5 (Construction process stage): transport of the finished product to final customers and installation
- C1, C2, C3, C4 (End of Life stage): The product follows two different End-of-Life scenarios: (1) 70% of the product is integrated in the concrete and collected as C&D waste. The transport of this fraction is carried out by lorry over 100 km (C2). A recycling ratio (C3) of 70% is considered in accordance with the European Directive 2008/98/CE and the remaining 30% is landfilled (C4). (2) The remaining 30% of the product is lost during the installation (A5) and it is washed away, therefore it has been assumed that this amount goes to wastewater treatment (C3).
- D (Resource recovery stage): reuse, recovery and/or recycling potentials, expressed as net impacts and benefit.

Table 2: System boundaries

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	
Geography	NO	NO, EU	NO	EU	EU	-	-	-	-	-	-	-	EU	EU	EU	EU	EU	
Specific data	> 90%					-	-	-	-	-	-	-	-	-	-	-	-	
Variation – products	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	-

MND: Module Not Declared

A brief description of production process is the following:

The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific tanks and added in the production mixer, according to the formula of the product. Other raw materials, supplied in bags, tanks, drums and cans, are stored in the warehouse and added manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then filled in IBC, drums, buckets or cans, put on wooden pallets and stored in the finished products warehouse. The quality of final products is controlled before the sale.

Figure 1: Production process detail - © Photo Halvor Gudim

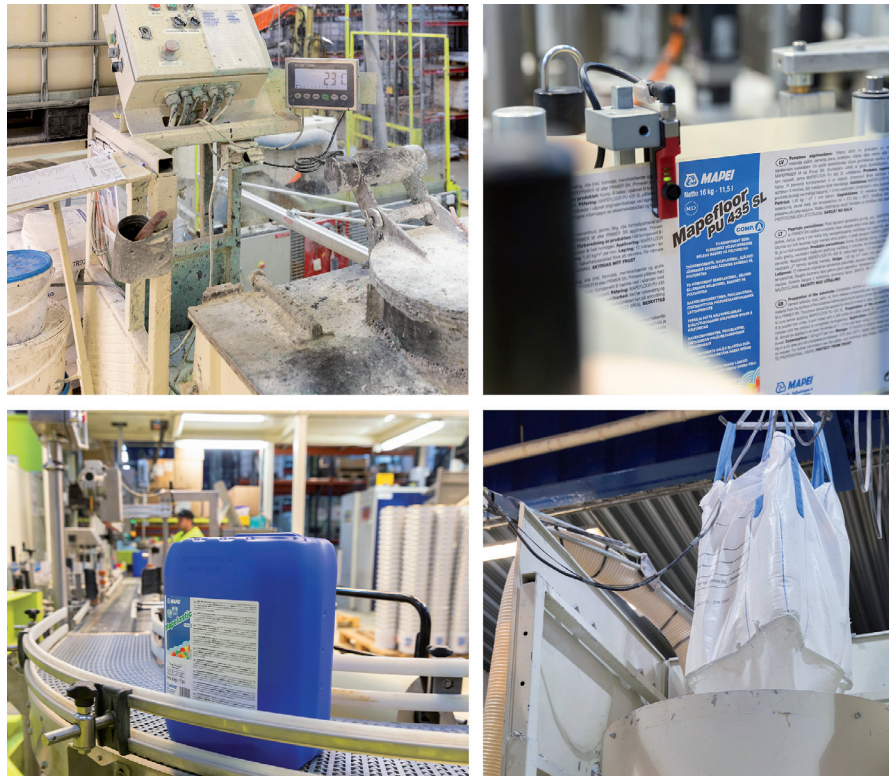


Table 3: Transport to the building site (A4)

Scenario information	Value	Unit
Means of transport: truck-trailer euro 6, gross weight 34-40 t, payload capacity 27 t		
Diesel consumption	0,002	l/100km
Transport distance	1000	km
Capacity utilisation (including empty runs)	85	%
Gross density of products transported	~ 910	kg/m ³
Capacity utilisation volume factor	1	-

Table 4: Installation into the building (A5)

Scenario information	Value	Unit
Ancillary materials for installation	0	kg
Water use	0	m ³
Other resources use	0	kg
Electricity (Norwegian grid mix)	0	MJ
Waste materials on building site before waste processing, generated by the product's installation (specified by type)	0,00505 (wood) 0,00345 (plastic) 0,00473 (metal)	kg
Output materials (specified by type) as result of waste processing at the building site e.g. of collection for recycling, for energy recovery, disposal (specified by route)	0,0069 (energy recovery) 0,0039 (recycling) 0,0024 (landfill)	kg
Direct emission to ambient air, soil and water	0	kg

Table 5: End of Life (C1-C4)

Scenario information	Value	Unit
Collected separately	0,3	kg
Collected with mixed construction waste	0,7	kg
Reuse	0	kg
Recycling	0,49	kg
Energy recovery	0	kg
Landfill	0,21	kg
Wastewater Treatment	0,3	kg
Transport to recycling	100	km
Transport to landfill	100	km

6. CUT-OFF RULES AND ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data. Cut-off criteria, where applied, are described in Table 6.

Table 6: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: Production (auxiliary materials)	Less than 10^{-5} kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%
A3: Air emissions (particulate matter)	Less than 10^{-4} kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%

For the allocation procedure and principles consider the following table (Table 7):

Table 7: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of product: A1: Electricity is allocated to the specific production line
A3	All data are referred to 1 kg of packaged product: A3-wastes: All data are allocated to the whole production plant

7. ENVIRONMENTAL PERFORMANCE AND INTERPRETATION



GWP

Climate change

GWPTotal - Global Warming Potential refers to the emission/presence of GHGs (greenhouse gases) in the atmosphere (mainly CO₂, N₂O, CH₄) which contribute to the increase in the temperature of the planet.

GWP-total considers:

- GWP-fossil
- GWP-biogenic
- GWP-luluc (land use and land use change)



ODP

Ozone Depletion

Ozone Depletion Potential refers to the degradation of the stratospheric layer of the ozone involved in blocking the UV component of sunrays. Depletion is due to particularly reactive components that originate from chlorofluorocarbon (CFC) or chlorofluoromethane (CFM).



AP

Acidification

Acidification Potential refers to the emission of specific acidifying substances (i.e. NO_x, SO_x) in the air. These substances decrease the pH of the rainfall with predictable damages to the ecosystem.



EP

Eutrophication

Eutrophication Potential refers to the nutrient enrichment, which determines unbalance in ecosystems and causes the death of the fauna and decreased biodiversity in flora.

It considers:

- EP-freshwater: aquatic freshwater
- EP-marine: aquatic marine
- EP-terrestrial



POCP

Photochemical ozone formation

The Photochemical Ozone Creation Potential is the ozone formation in low atmosphere. This is quite common in the cities where a great amount of pollutants (like VOC and NO_x) are emitted every day (industrial emissions and vehicles). It is mainly diffused during the summertime.



**ADP
minerals&metals**

Depletion of abiotic resources – minerals and metals

Abiotic Depletion Potential elements refers to the depletion of the mineral resources.



ADP - fossil

Depletion of abiotic resources – fossil fuel

Abiotic Depletion Potential fossil fuel refers to the depletion of the fossil fuel resources.



WDP

Water use

It expresses the potential deprivation of water, that consists in not having the water needs satisfied.

The following tables show the environmental impacts for the products considered according to the requirements of EN15804:2012+A2:2019/AC:2021. The results are referred to the declared unit (see § 4). The additional environmental indicators are not declared.

NOTE: in the whole document, the comma “ , ” is the decimal separator, while the point “ . ” is the thousands separator.

MAPEFORM ECO OIL 700

(1 kg of product in IBC)

Table 8: MAPEFORM ECO OIL 700: Potential environmental impact – mandatory indicators according to EN 15804 referred to 1 kg of product in IBC

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	-1,43E+00	6,55E-02	1,40E-02	-1,35E+00	5,99E-02	1,52E-02	3,01E-06	5,48E-03	3,14E+00	3,08E-03	0,00E+00
GWP _{FOSSIL}	(kg CO ₂ eq.)	1,62E+00	6,48E-02	1,94E-02	1,71E+00	5,91E-02	8,91E-03	2,98E-06	5,41E-03	1,93E-03	3,06E-03	0,00E+00
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-3,14E+00	2,01E-04	-5,40E-03	-3,15E+00	2,07E-04	6,28E-03	3,55E-08	1,95E-05	3,14E+00	1,15E-05	0,00E+00
GWP _{LULUC}	(kg CO ₂ eq.)	8,76E-02	4,68E-04	9,19E-06	8,81E-02	5,42E-04	1,91E-06	3,21E-10	4,93E-05	1,35E-05	9,51E-06	0,00E+00
ODP	(kg CFC 11 eq.)	1,00E-07	1,06E-14	5,46E-10	1,01E-07	5,12E-15	1,69E-15	5,44E-17	6,93E-16	3,89E-15	7,78E-15	0,00E+00
AP	(mol H ⁺ eq.)	3,62E-02	6,24E-04	5,41E-05	3,68E-02	6,50E-05	5,01E-06	6,27E-09	6,74E-06	9,68E-06	2,17E-05	0,00E+00
EP _{FRESHWATER}	(kg P eq.)	4,48E-04	1,88E-07	3,14E-06	4,52E-04	2,13E-07	1,59E-09	1,10E-11	1,95E-08	1,92E-07	6,16E-09	0,00E+00
EP _{MARINE}	(kg N eq.)	2,38E-02	1,82E-04	1,19E-05	2,40E-02	2,11E-05	1,90E-06	1,50E-09	2,27E-06	5,08E-06	5,61E-06	0,00E+00
EP _{TERRESTRIAL}	(mol N eq.)	1,56E-01	2,02E-03	1,23E-04	1,58E-01	2,58E-04	2,17E-05	1,57E-08	2,73E-05	4,84E-05	6,17E-05	0,00E+00
POCP	(kg NMVOC eq.)	5,50E-03	4,56E-04	4,49E-05	6,00E-03	5,52E-05	4,99E-06	4,01E-09	5,79E-06	1,19E-05	1,69E-05	0,00E+00
ADP _{MINERALS&METALS} *	(kg Sb eq.)	7,94E-06	3,47E-09	5,82E-08	8,00E-06	3,77E-09	2,68E-11	4,56E-13	3,51E-10	1,93E-09	1,41E-10	0,00E+00
ADP _{FOSSIL} *	(MJ)	1,55E+01	8,51E-01	4,64E-01	1,68E+01	7,95E-01	7,06E-03	6,18E-05	7,25E-02	3,65E-02	4,07E-02	0,00E+00
WDP*	(m ³ world eq.)	2,38E+00	6,69E-04	6,48E-03	2,39E+00	6,74E-04	1,09E-03	6,48E-07	6,43E-05	-1,25E-02	3,36E-04	0,00E+00

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

* the results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experienced with the indicator

Table 9: MAPEFORM ECO OIL 700: Potential environmental impact – additional mandatory and voluntary indicators referred to 1 kg of product in IBC

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	1,52E+00	6,40E-02	1,90E-02	1,60E+00	5,85E-02	8,89E-03	2,96E-06	5,35E-03	1,93E-03	3,02E-03	0,00E+00

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 10: MAPEFORM ECO OIL 700: Use of resources referred to 1 kg of product in IBC

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	4,80E+01	5,28E-02	1,51E-01	4,82E+01	5,63E-02	1,20E-03	3,70E-05	5,28E-03	3,85E-03	6,64E-03	0,00E+00
PERM	MJ	0,00E+00	0,00E+00	9,60E-02	9,60E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	4,80E+01	5,28E-02	2,47E-01	4,83E+01	5,63E-02	1,20E-03	3,70E-05	5,28E-03	3,85E-03	6,64E-03	0,00E+00
PENRE	MJ	1,55E+01	8,54E-01	4,64E-01	1,68E+01	7,97E-01	7,07E-03	6,18E-05	7,28E-02	3,66E-02	4,08E-02	0,00E+00
PENRM	MJ	0,00E+00	0,00E+00	1,59E-01	1,59E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,56E+01	8,54E-01	6,22E-01	1,71E+01	7,97E-01	7,07E-03	6,18E-05	7,28E-02	3,66E-02	4,08E-02	0,00E+00
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	5,55E-02	5,74E-05	1,74E-04	5,57E-02	6,20E-05	2,59E-05	2,97E-08	5,78E-06	-2,89E-04	1,03E-05	0,00E+00

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

Table 11: MAPEFORM ECO OIL 700: Waste production and output flows referred to 1 kg of product in IBC

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	3,39E-04	2,37E-12	4,32E-04	7,70E-04	2,95E-12	1,65E-13	-4,83E-15	2,25E-13	-1,49E-13	8,87E-13	0,00E+00
NHWD	kg	6,88E-02	1,22E-04	3,54E-02	1,04E-01	1,15E-04	3,56E-03	4,54E-08	1,11E-05	2,14E-04	2,04E-01	0,00E+00
RWD	kg	1,38E-04	2,04E-06	8,34E-06	1,49E-04	1,03E-06	1,93E-07	9,81E-09	1,36E-07	6,10E-07	4,65E-07	0,00E+00
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	2,52E-03	2,52E-03	0,00E+00	3,99E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,88E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed

Table 12: MAPEFORM ECO OIL 700: Information on biogenic carbon content at the factory gate referred to 1 kg of product in IBC

Biogenic Carbon Content	Unit	Quantity
Biogenic carbon content in product	kg C	6,45E-01
Biogenic carbon content in packaging	kg C	2,17E-03

Tables from 8 to 12 show absolute results for all the environmental categories considered.

The main contribution to the environmental impact categories in the product life cycle comes from **module A1** (extraction and processing of raw materials). Its relative contribution is over 80% in all the categories, except for GWP_{TOTAL} and $GWP_{BIOGENIC}$ where the contribution of the **module A1** is negative due to the biogenic carbon stored in the product. This negative contribution is compensated in **module C3**, when the product reaches its end of life. The same balanced is applied for the negative contribution of the **module A3** to $GWP_{BIOGENIC}$, that is balanced in **module A5**, where the packaging reaches its end of life.

More details about electrical mix used in this EPD is shown below:

	Data source	GWP-GHG	Unit
Residual electricity grid mix (NO) – 2022	AIB	0,634*	kg CO ₂ -eqv/kWh

*CML2001 – Aug. 2016

8. DATA QUALITY

Table 14: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
A1; A3		
Vegetable Oils	Sphera Database; Ecoinvent 3.8	2020 – 2022
Residual electricity grid mix (NO)	Sphera Database	2019
Packaging components (EU)	Sphera Database; Ecoinvent 3.8;	2020 - 2022
A2		
Truck, Euro 5, 27t payload (GLO)	Sphera Database	2022
Light train, gross tonne weight 500t / 363t payload (GLO)	Sphera Database	2022
Oceanic ship (27500 DWT – GLO)	Sphera Database	2022
Diesel for transport (EU)	Sphera Database	2019
Heavy Fuel Oil (EU)	Sphera Database	2019
Electricity grid mix (EU)	Sphera Database	2019
A4		
Truck, Euro 6, 27t payload (GLO)	Sphera Database	2022
Diesel for transport (EU)	Sphera Database	2019
A5		
Commercial waste in municipal waste incineration plant	Sphera Database	2022
Electricity grid mix (EU)	Sphera database	2019
C1 – C4		
Truck (EURO 6 - 9,3 ton payload – GLO)	Sphera Database	2022
Electricity grid mix (EU)	Sphera Database	2019
Diesel for transport (EU)	Sphera Database	2019
Wastewater treatment (EU)	Sphera Database	2022
Construction waste dumping (EU)	Sphera Database	2022
Construction waste treatment (EU)	Sphera Database	2022

All data included in table above refer to a period between 2018 and 2021; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European and global databases.

All dataset are not more than 10 years old according to EN 15804 §6.3.8.2 “Data quality requirements”. The Quality level concerning datasets used in the EPD can be considered as “very good” or “good” according to Annex E of the EN 15804 (current version).

Primary data concern the year 2022 and represent the whole annual production.

9. REQUISITE EVIDENCE

9.1 Indication for calculation of Module A4 (Transport from the factory to the jobsite)

To calculate the impact of transporting 1 kg of product from the factory gate (Sagstua) to the jobsite, use the following formula:

$$\text{Transport Impact} = EF \text{ (kg/DU)} * \text{distance (km)}$$

EF: Emission Factor; DU: declared Unit

Table 15: The EFs are related to 1 kg of product transported with truck EURO 5 and EURO 6

Indicator	Unit	EF (EURO 5)	EF (EURO 6)
GWP _{TOTAL}	(kg CO ₂ eq.)/km	6,08E-05	5,96E-05
GWP _{FOSSIL}	(kg CO ₂ eq.) /km	6,00E-05	5,89E-05
GWP _{BIOGENIC}	(kg CO ₂ eq.) /km	2,15E-07	2,12E-07
GWP _{LULUC}	(kg CO ₂ eq.) /km	5,46E-07	5,37E-07
ODP	(kg CFC 11 eq.) /km	7,67E-18	7,55E-18
AP	(mol H+ eq.) /km	1,90E-07	7,15E-08
EP _{FRESHWATER}	(kg P eq.) /km	2,16E-10	2,12E-10
EP _{MARINE}	(kg N eq.) /km	8,62E-08	2,38E-08
EP _{TERRESTRIAL}	(mol N eq.) /km	9,69E-07	2,87E-07
POCP	(kg NMVOC eq.) /km	1,72E-07	6,15E-08
ADP _{MINERALS&METALS}	(kg Sb eq.) /km	3,88E-12	3,82E-12
ADP _{FOSSIL}	(MJ) /km	8,03E-04	7,90E-04
WDP	(m ³ world eq.) /km	7,12E-07	7,01E-07

Example:

If the product is transported by truck (EURO 6) from Sagstua (production plant) to Oslo (Jobsite) for approximately 90 km, the GWP impact will be:

$$GWP_{TOTAL} = 5,96E-05 * 90km = 5,36E-03 \text{ kg CO}_2\text{eq}$$

9.2 Biobased content

Mapeform Eco Oil 700 contains around 86% of biobased materials, with an estimated quantity of biogenic C content of 0,645 kg per kg of product.

11. VERIFICATION AND REGISTRATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

CEN standard EN15804 served as the Core Product Category Rules (PCR)	
PCR:	PCR 2019:14 Construction products (EN 15804:A2), Version 1.11, 2021-02-05, UN CPC code 54
PCR review was conducted by:	The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact .
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	<input checked="" type="checkbox"/> EPD Process Certification <input type="checkbox"/> EPD Verification
Third party verifier:	Certiquality S.r.l. Number of accreditation: 003H rev15
Accredited or approved by:	Accredia
Procedure for follow-up of data during EPD validity involves third-party verifier	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

12. REFERENCES

- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS - ENVIRONMENTAL PRODUCT DECLARATIONS - CORE RULES FOR THE PRODUCT CATEGORY OF CONSTRUCTION PRODUCTS
- EUROPEAN DIRECTIVE 94/62/EC
- EUROPEAN DIRECTIVE 2008/98/EC
- EUROPEAN RESIDUAL MIXES VERSION 1.0, 2023-06-01 (AIB: ASSOCIATION OF ISSUING BODIES)
- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 3.01
- ISO 14025 ENVIRONMENTAL LABELS AND DECLARATIONS - TYPE III ENVIRONMENTAL DECLARATIONS - PRINCIPLES AND PROCEDURES
- ISO 14044 ENVIRONMENTAL MANAGEMENT – LIFE CYCLE ASSESSMENT – REQUIREMENTS AND GUIDELINES
- PCR 2019:14 CONSTRUCTION PRODUCTS (EN 15804: A2), UN CPC CODE 54; VERSION 1.11

CONTACT INFORMATION

EPD owner:



Mapei AS

www.mapei.com/NO-NO/

LCA author:



Mapei SpA

www.mapei.it;
Environmental Sustainability Office

Programme operator:



EPD International AB

Address: EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

Website: www.environdec.com
E-mail: info@environdec.com

HEAD OFFICE

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

mapei.com

mapei@mapei.it



ANNEX 1

ANNEX 1: Self declaration from EPD owner

Specific requirements

1 Applied electricity data set used in the manufacturing phase

The electricity mix for the electricity used in manufacturing (A3) is the electricity grid mix

<0,634 kg CO₂ eqv/kWh>

2 Transport from the place of manufacture to a central warehouse

Transport distance, and CO₂-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given. The following table shall be included in the EPD:

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Value (l/t)	Kg CO ₂ -eqv./DU
Boat							
Truck	<85>	<Truck 27 tonn, EURO6>	<95>	<0,0160>	l/tkm	<1,52>	4,59E-03
Railway							
Rail							
Air							
Total	<85>	<Truck 27 tonn, EURO6>	<95>	<0,0160>	l/tkm	<1,52>	4,59E-03

3 Impact on the indoor environment

- Indoor air emission testing has been performed; specify test method and reference;
M1, _____
- No test has being performed
- Not relevant; specify _____